


**ARUBA SPECIFICATIONS**

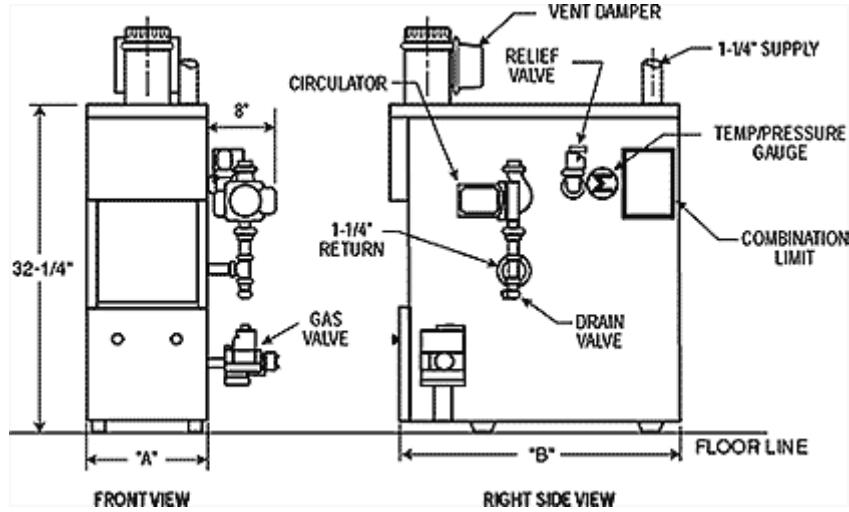

Model Number	# of Sections	Natural or LP Gas					Flue Collar Dia. (In.)	A (In.)	B (In.)	Water Content (Gal.)	Shipping Weight (Approx.)
		Annual Efficiency AFUE (%) SPD	Annual Efficiency AFUE (%) EID	Input (BTU/HR)	D.O.E. Heating Capacity (BTU/HR)	IBR Net Rating (BTU/HR)					
AWI037	2	80.0	82.3	37,000	30,000	26,000	4	10-1/2	28	2.4	217
AWI061	3	80.0	82.6	61,000	50,000	43,000	4	11-3/4	28	3.2	267
AWI095	4	80.1	82.3	95,000	78,000	68,000	5	15	28	4.0	317
AWI128	5	80.2	82.0	128,000	105,000	91,000	6	18-1/4	28	4.7	367
AWI162	6	80.3	81.7	162,000	132,000	115,000	6	21-1/2	28	5.5	417
AWI195	7	80.4	81.4	195,000	159,000	138,000	7	24-3/4	30	6.3	467
AWI229	8	80.4	81.2	229,000	186,000	162,000	7	28	30	7.0	517
AWI262	9	80.5	80.9	262,000	212,000	184,000	8	31-1/4	30	7.8	567
AWI295	10	80.7	80.6	295,000	238,000	207,000	8	34-1/2	30	8.6	617

Model Number	# of Sections	Natural Gas ONLY					Flue Collar Dia. (In.)	A (In.)	B (In.)	Water Content (Gal.)	Shipping Weight (Approx.)
		Annual Efficiency AFUE (%) SPD	Annual Efficiency AFUE (%) EID	Input (BTU/HR)	D.O.E. Heating Capacity (BTU/HR)	IBR Net Rating (BTU/HR)					
TWI061	3	-	83.0	61,000	51,000	41,000	4	11-3/4	28	3.2	267
TWI095	4	-	83.0	95,000	79,000	69,000	5	15	28	4.0	317
TWI128	5	-	83.0	128,000	106,000	92,000	6	18-1/4	28	4.7	367
								21-			

TWI162	6	-	83.0	162,000	132,000	117,000	6	1/2	28	5.5	417
--------	---	---	------	---------	---------	---------	---	-----	----	-----	-----